



EUROSATCOM
VSATECH ASSOCIÉ

LNB C-BAND PLL 3200-sBPF 5G INTERFERENCE LNB

SPECIFICATIONS


Noise Temperature	60K max. at room temp. @ CF
Phase Noise (SSB) max.	-80 dBc/Hz at 1kHz -85 dBc/Hz at 10kHz -95 dBc/Hz at 100kHz
Input VSWR	2.2 : 1 max.
Output VSWR	2.5 : 1 max.
Gain	62 dB typ., 55 dB min., 70 dB max.
Gain Flatness (over full band)	≤ 6 dB p-p
Output P1dB	+ 9 dBm min.
DC Power	+ 12V to + 24V DC
Current	400 mA max.
Switching Voltage	Band 1: 13V Band 2: 18V
Input (waterproof)	WR-229 waveguide grooved
Output (waterproof)	F-Connector (75 Ohm) N-Connector (50 Ohm)
Dimensions (L x W x H)	159 mm x 98.55 mm x 69.85 mm (6.26 in x 3.88 in x 2.75 in)
Weight	500 g (17.64 oz)
Operating Temperature	-40 to + 60°C
Storage Temperature	-50 to +70°C
Protection Rating	IP66



FREQUENCY BANDS

	Band 1	3200-sBPF-5 - Band 2	3200-sBPF-6 - Band 2
Input Frequency (GHz)	3.40 - 4.20	3.90 - 4.20	4.00 - 4.20
L.O. Frequency (GHz)	5.15	5.15	5.15
Output Frequency (MHz)	950 - 1750	950 - 1250	950 - 1150
Rejection (-25dBm interference signal)	No rejection	< 3.8 GHz and > 4.8 GHz with no degradation	< 3.9 GHz and > 4.8 GHz with no degradation

MECHANICAL DIAGRAM

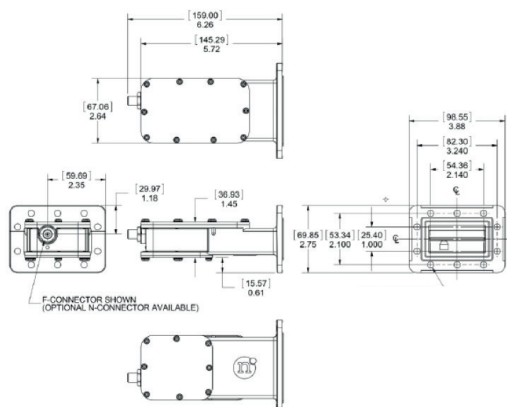

HOW TO ORDER

3200N-sBPF-5

FREQUENCY
5: 3.40 - 4.20 / 3.90 - 4.20 GHz
6: 3.40 - 4.20 / 4.00 - 4.20 GHz

SWITCHABLE

CONNECTOR
Type F Connector (75 Ohm)
Type N Connector (50 Ohm)

L.O. STABILITY
1: ± 10 kHz
2: ± 25KHz

LNB SERIES #



EUROSATCOM
VSATECH ASSOCIÉ

3 avenue du Canada, bât. Zeta, 91940 Les Ulis, France

+33 1 69 18 19 30

www.eurosatcom.eu

sales@eurosatcom.eu