



EUROSATCOM
VSATECH ASSOCIÉ

ViaLiteHD® L-Band HTS RF over Fiber Link

50 Ohm CWDM L-Band HTS

- Up to 50 km
- L-Band HTS (700-2450 MHz)
- Up to 16 channels in a single fiber
- 65 dB dynamic range for 500 MHz traffic
- 13/18 V and 22 KHz tone LNB option
- Blind mate option
- Standard 5-year warranty



ViaLiteHD L-Band HTS fiber optic 50 km links use 1550 nm lasers and have been designed for the satellite industry to transport RF signals between antennas and control rooms over fiber. Due to the very wide dynamic range the same link can be used in both the transmit and receive paths. This dynamic range allows High Throughput Satellite (HTS) transponder bandwidths of 500, 800 or even 1500 MHz to be transported, as well as multiple standard 36 MHz transponders.

The chassis cards are available with the ViaLiteHD blind mate option, which allows all cables to be connected at the rear of the chassis when installed. It also allows any configuration changes to be completed without disturbing the connections and very fast changeover of cards; enabling five 9s reliability.

Options include :

- 50 Ω electrical connectors: SMA and MCX
- Optical connectors: SC/APC, LC/APC, FC/APC and E2000/APC
- Test ports on Tx and Rx modules
- Built-in BiasT for LNB powering through RF connection
- LNB control circuit with 13/18 VDC and 22 kHz tone
- Blind mate connectivity (SC/APC and SMA)
- Serial digital channel to 20 kb/s on same optical path

APPLICATION

- Fiber count reduction
- Fixed satcom earth stations and teleports
- Broadcast facilities
- Mobile SNG, military and flyaways
- VSAT hubs (IP gateways)
- Marine antennas
- Telemetry, Tracking and Command (TT&C)
- Oil and gas platforms
- Television Receive-Only (TVRO)

FORMATS

- 3U Chassis
- 1U Chassis
- Blue OEM
- Yellow OEM
- Outdoor enclosures

RELATED PRODUCTS

- 50 km L-Band HTS
- 75 Ohm CWDM L-Band HTS
- HTS 100 km+ systems
- DWDM links



EUROSATCOM
VSATECH ASSOCIÉ





EUROSATCOM
VSATECH ASSOCIÉ

ViaLiteHD®

L-Band HTS RF over Fiber Link

POPULAR PRODUCTS


HRT-L1-8R-33-C1610

L-Band 700-2450 MHz, 50 Ohm SMA, Singlemode SC/APC, Rack plug-in module, Wavelength 1610 nm

HRR-L1-8R-03

L-Band 700-2450 MHz, 50 Ohm SMA, Singlemode SC/APC, Rack plug-in module

PRODUCT CONFIGURATOR

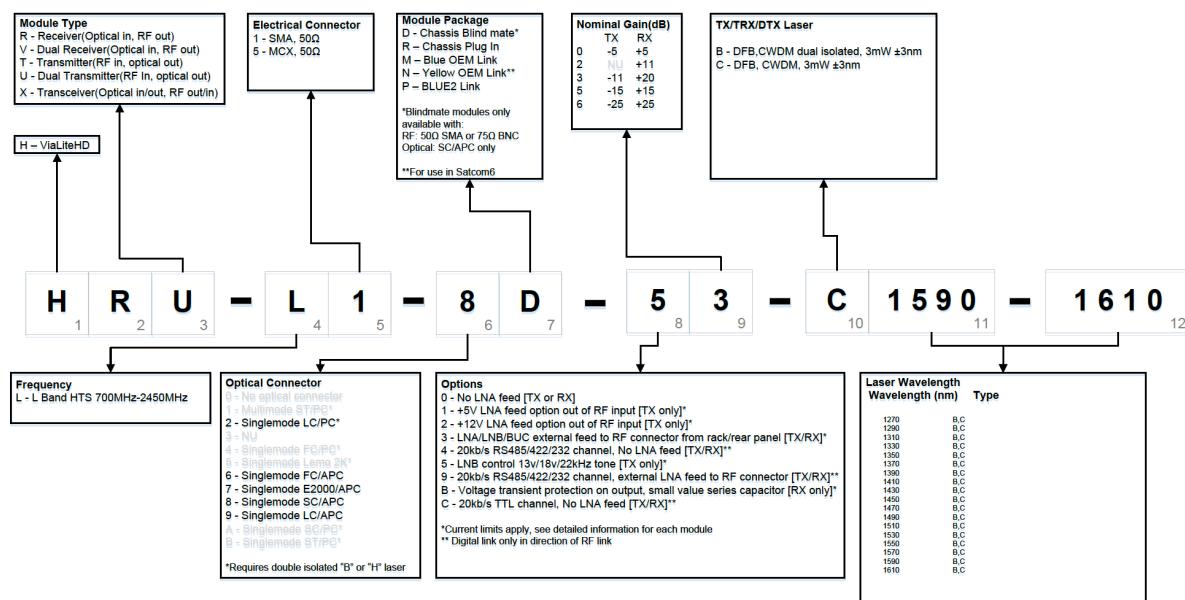

RF PARAMETERS FOR POPULAR LINK GAINS

Link	Tx Gain	Rx Gain	Link Noise Figure (Default Tx Gain)	Link Noise Figure (Max Tx Gain)	Link P1dB (Default Tx Gain)	Link P1dB (Max Tx Gain)
HRT-L1-xx-x3-C1610 & HRR-L1-xx-x3 (9dB Gain Link)	-11 dB	+20 dB	20 dB	12.5 dB	-1 dB	-8.5 dB
HRT-L1-xx-x5-C1510 & HRR-L1-xx-x5 (Unity Gain Link)	-15 dB	+15 dB	24 dB	12.5 dB	+3 dB	-8.5 dB
HRT-L1-xx-x6-C1530 & HRR-L1-xx-x6 (High P1dB Unity Gain Link)	-25 dB	+25 dB	34 dB	29 dB	+13 dB	+9 dB



EUROSATCOM
VSATECH ASSOCIÉ





EUROSATCOM
VSATECH ASSOCIÉ

ViaLiteHD® L-Band HTS RF over Fiber Link

	Units	Note	L-Band HTS 50 ohms
Transmitter (Tx)	-		HRT-L1-8R-33-S1310 (example)
Receiver (Rx)	-		HRR-L1-8R-03 (example)
Frequency range	MHz		700-2450
Impedance, RF connector	-		50Ω SMA, blind made
VSWR	(typ)		1:1.5
Transmitter (Tx) gain, default	dB (typ)	a	-11 +/- 0.5
Receiver (Rx) gain, default	dB (typ)	a	+20 +/- 0.5
Link gain (TX gain / RX gain), default	dB (typ)	a	+9 +/- 1.5
TX gain adjustment range	dB (typ)		15.5
TX gain adjustment from default gain	dB (min)	d	+/- 3
RX gain adjustment range	dB (typ)		15.5
RX gain adjustment from default gain	dB (min)	d	+/- 3
Gain adjustment step size Rx and TX	dB (typ)		0.5
Flatness, fullband	dB (max)	a h	± 1.2
Flatness, fullband	dB (typ)	a h	± 0.5
Flatness, 36 MHz	dB (typ)	a	± 0.2
Gain stability over temperature range	dB (max)	a	± 3
Gain stability	dB (typ)	c	0.25 @ 24 hrs
Nominal input signal / output signal	dBm	b	-20 / -20
IMD @ nominal output power	dB (typ)	a k	-61
CNR @ nominal input power, 36 MHz	dB (typ)	a k	57
P1dB _{input}	dBm (typ)	a k	-1
P1dB _{input} , at minimum TX gain	dBm (typ)	a k	0.5
IP3 _{input} , at default gain	dBm (typ)	a k	11
Noise figure, at default gain	dB (typ)	a k	20
Noise figure, at maximum TX gain	dB (typ)	c k	13
Noise figure, 5dB optical loss	dB (typ)	a	26
SFDR	dB/Hz ^{2/3} (typ)	i	110
Test port gain, transmitter	dB (typ)	i	-20
Test port gain, receiver	dB (typ)	i	-20
Test port flatness	dB (typ)		± 1
Maximum input power without damage	dBm (min)		15
LNB power	-		External 0-28 V @ 350 mA from chassis power connector
Power consumption Tx	W (typ)		1.9
Power consumption Rx	W (typ)		1.3
Optical connector	-		SC/APC, blind mate
Optical wavelength	nm		1310 ± 20
Laser type	-		DFB (Distributed feedback) laser
Optical power output	dBm (typ)		4.5
Summary alarm output	-	e	Open drain alarm: OPEN: Alarm, CURRENT SINK: okay
Operating temperature range	-		-20 °C to +60 °C
Storage temperature range	-		-40 °C to +70 °C
Humidity	RH		95% non-condensing humidity

a Nominal input power @ 0 dB optical loss

b Nominal input power @ 1 dB optical loss

c Nominal output power @ 5 dB optical loss

h Default gain setting

k Measured @ 1.2 GHz

l Relative to rear port @1.2 GHz

m All tests @ 25 °C after 15 minutes warm up

n Guaranteed minimum adjustment from default gain



EUROSATCOM
VSATECH ASSOCIÉ

3 avenue du Canada, bât. Zeta, 91940 Les Ulis, France

+33 1 69 18 19 30

www.eurosatcom.eu

sales@eurosatcom.eu



EUROSATCOM
VSATECH ASSOCIÉ

ViaLiteHD® L-Band HTS RF over Fiber Link

ACCESSORIES

Type	Key features
SNMP/Web Browser Card	<ul style="list-style-type: none"> Easy to use graphical user interface (GUI) Real time monitoring of card performance Alarm monitoring and event logging Control of gain adjustment Compatible with all ViaLiteHD rack chassis and modules Easy integration with network management systems (NMS) using management information base (MIB) tables Actively manage redundancy switching New RF cards can be automatically reprogrammed with the previous card parameters Remote SNMP to local SNMP connection via optical fiber Provides remote LAN 10/100 Ethernet
Dual Redundancy	<ul style="list-style-type: none"> 1:1 redundancy for L-Band Maximises link up-time Can be used to backup copper coax Manual and automatic control via SNMP Flexible configuration options Other redundancy options available
Rack Chassis	<ul style="list-style-type: none"> 3U accepts up to 13 RF or Support cards, plus an SNMP card and dual power supplies A 1U chassis accepts up to 3 RF or Support cards or 2 cards and an SNMP card (with dual power supplies) Up to 26 channels per 3U chassis (using dual RF cards) – reducing the amount of rack space required Blind mate option All modules hot-swappable and auto-reconfigure with SNMP option On-card LNB and BUC power options Power fed through rear chassis connector to card Bias Tees System can be monitored and controlled remotely via SNMP using a web browser
Outdoor Enclosures	<ul style="list-style-type: none"> CE approved and EMC compatible IP rated and NEMA approved Plug and play format Suitable for harsh environments All modules hot swappable Dual redundant power options Interface for monitor and control (M&C) systems



EUROSATCOM
VSATECH ASSOCIÉ