



EUROSATCOM
VSATECH ASSOCIÉ

RF Over Fiber Systems

L-Band HTS RF over Fiber Link

50 Ohm L-Band HTS 50km

- 10-50km link
- 65dB dynamic range for 500MHz traffic
- L-Band HTS (700-2450MHz)
- 13/18V and 22kHz tone LNB option
- Blind mate option
- Standard 5-year warranty



ViaLiteHD L-Band HTS fiber optic 50km links use 1550nm lasers and have been designed for the satellite industry to transport RF signals between antennas and control rooms over fiber. Due to the very wide dynamic range the same link can be used in both the transmit and receive paths.

This dynamic range allows High Throughput Satellite (HTS) transponder bandwidths of 500MHz, 800MHz or even 1500MHz to be transported, as well as multiple standard 36MHz transponders.

The chassis cards are available with the ViaLiteHD blind mate option, which allows all cables to be connected at the rear of the chassis when installed. It also allows any configuration changes to be completed without disturbing the connections and very fast changeover of cards; enabling five 9s reliability.

OPTIONS INCLUDE

- 50Ω electrical connectors: SMA and MCX
- Optical connectors: SC/APC, LC/APC, FC/APC and E2000/APC
- Test ports on Tx and Rx modules
- Built-in BiasT for LNB powering through RF connection
- LNB control circuit with 13/18VDC and 22kHz tone
- Blind mate connectivity (SC/APC and SMA)
- Serial digital channel to 20kb/s on same optical path

APPLICATIONS

- Fixed satcom earth stations and teleport Broadcast facilities
- Mobile SNG, military and flyaways
- VSAT hubs (IP gateways)
- Marine antennas
- Telemetry, Tracking and Command (TT&C)
- Oil and gas platforms
- Television Receive-Only (TVRO)

FORMATS

- 3U Chassis
- 1U Chassis
- Blue OEM and Blue2 Link
- Yellow OEM
- Outdoor enclosures

RELATED PRODUCTS

- 0-10km 1310nm L-Band HTS
- 75 Ohm L-Band HTS
- HTS 100km+ systems
- DWDM links



EUROSATCOM
VSATECH ASSOCIÉ






RF Over Fiber Systems

L-Band HTS RF over Fiber Link

PRODUCT CONFIGURATOR

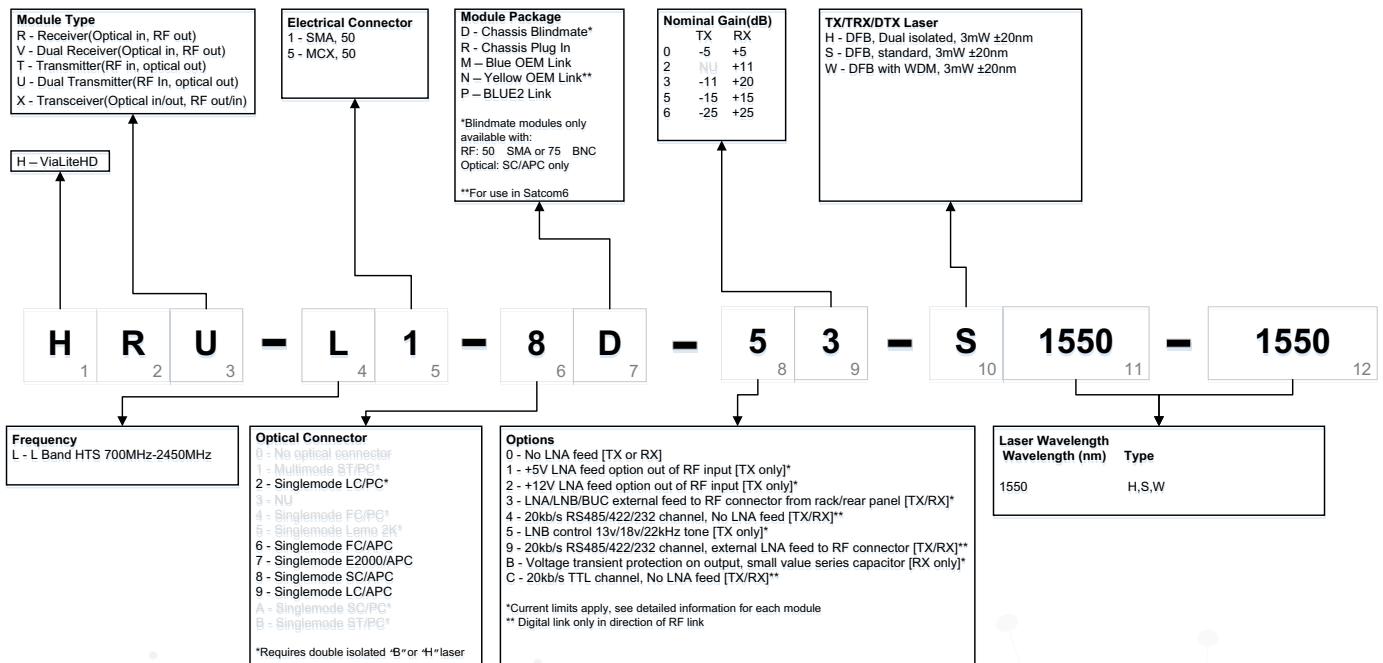

POPULAR PRODUCTS

[HRT-L1-8R-53-S1550](#)

L-Band HTS (700-2450MHz) chassis plug-in transmitter with built-in LNB power, 50 ohm SMA and SC/APC connectors

[HRT-L1-8D-33-S1550-1550](#)

L-Band HTS (700-2450MHz) dual chassis plug-in transmitter with built-in BiasT, 50 ohm SMA and SC/APC blind mate connectors

[HRR-L1-8R-03](#)

L-Band HTS (700-2450MHz) chassis plug-in receiver with 50 ohm SMA and SC/APC connectors

[HRV-L1-8D-03](#)

L-Band HTS (700-2450MHz) dual chassis plug-in receiver with 50 ohm SMA and SC/APC blind mate connectors

[HRX-L1-6P-33-S1550](#)

L-Band HTS (700-2450MHz) Blue2 Link transceiver with 50 ohm SMA and FC/APC connectors

[HRR-L1-8N-03](#)

L-Band HTS (700-2450MHz) Yellow OEM receiver with 50 ohm SMA and SC/APC connectors

RF PARAMETERS FOR POPULAR LINK GAINS

Links	TX Gain	Rx Gain	Link Noise Figure (Default Tx Gain)	Link Noise Figure (Max Tx Gain)	Link P1dB (Default Tx Gain)	Link P1dB (Max Tx Gain)
HRT-L1-xx-x3-S1550 & HRR-L1-xx-x3 (9dB Gain Link)	-11dB (+7.5/-8dB)	+20dB (+7.5/-8dB)	20dB	12.5dB	-1dBm	-8.5dBm
HRT-L1-xx-x5-S1550 & HRR-L1-xx-x5 (Unity Gain Link)	-15dB (+11.5/-4dB)	+15dB (+7.5/-8dB)	24dB	12.5dB	+3dBm	-8.5dBm
HRT-L1-xx-x6-S1550 & HRR-L1-xx-x6 (High P1dB Unity Gain Link)	-25dB (+5/-10.5dB)	+25dB (+7.5/-8dB)	34dB	29dB	+13dBm	+9dBm





EUROSATCOM
VSATECH ASSOCIÉ

RF Over Fiber Systems

L-Band HTS RF over Fiber Link

TECHNICAL SPECIFICATION

Transmitter	HRT-L1-8D-33-S1550 (example)
Receiver	HRR-L1-8D-03 (example)
Frequency range	700-2450 MHz
Impedance, RF connector	50Ω SMA, blind mate
VSWR	1:1.5 (typ)
Link gain (Tx gain / Rx gain), default	+9 (-11 / +20) dB (nom) ^a
Tx gain adjustment range	15.5 dB (typ)
Tx gain adjustment from default gain	-8.0 to +7.5 dB (typ)
Rx gain adjustment range	15.5 dB (typ)
Rx gain adjustment from default gain	-8.0 to +7.5 dB (typ)
Gain adjustment step size Rx and Tx	0.5 dB (typ)
Flatness, fullband	±1.2 dB (max) ^{a h}
Flatness, 36MHz	±0.5 dB (typ) ^{a h}
Gain stability over temperature range	±0.2 dB (typ) ^a
Gain stability	±3 dB (max) ^a
Nominal input signal / output signal	0.25 @ 24 hrs dB (typ)
IMD @ nominal output power	-20 / -20 dBm
CNR @ nominal input power, 36MHz	-61 dB (typ) ^c
P1dB _{in}	-57 dB (typ) ^b
P1dB _{in} , at minimum Tx gain	-1 dB (typ) ^{a k}
IP3 _{in} , at default gain	0.5 dB (typ) ^{a k}
Noise figure, at default gain	11 dB (typ) ^{a k}
Noise figure, at maximum Tx gain	20 dB (typ) ^{a k}
Noise figure, 5dB optical loss	13 dB (typ) ^{a k}
SFDR	26 dB (typ) ^{c k}
Test port gain, transmitter	110 dB/Hz ^{2/3} (typ) ^a
Test port gain, receiver	-20 dB (typ) ⁱ
Test port flatness	-20 dB (typ) ⁱ
Maximum input power (without damage)	±1 dB (typ) ⁱ
LNB power	15
Power consumption Tx	External 0-28V @ 350mA from chassis power connector
Power consumption Rx	1.9 W (typ)
Optical connector	1.3 W (typ)
Optical wavelength	SC/APC, blind mate
Laser type	1550 ± 20 nm
Optical power output	DFB (Distributed feedback) laser
Summary alarm output	4.5 dBm (typ)
Operating temperature range	Open drain alarm: OPEN: Alarm, CURRENT SINK: okay
Storage temperature range	-10°C to +50°C
Humidity	-40°C to +70°C
	95% non-condensing humidity RH



^a Nominal input power @ 0dB optical loss

^b Nominal input power @ 1dB optical loss

^c Nominal output power @ 5dB optical Loss

^h Default gain setting

^k Measured @ 1.2GHz

ⁱ Relative to rear port @1.2GHz

All tests @ 25°C after 15 minutes warm up





RF Over Fiber Systems

L-Band HTS RF over Fiber Link


ACCESSORIES

SNMP/Web Browser Card



- Easy to use graphical user interface (GUI)
- Real time monitoring of card performance
- Alarm monitoring and event logging
- Control of gain adjustment
- Compatible with all ViaLiteHD rack chassis and cards
- Easy integration with network management systems (NMS) using management information base (MIB) tables
- Actively manage redundancy switching
- New RF cards can be automatically reprogrammed with the previous card parameters
- Remote SNMP to local SNMP connection via optical fiber
- Provides remote LAN 10/100 Ethernet link

Dual Redundancy



- 1:1 redundancy for L-Band
- Maximises link up-time
- Can be used to backup copper coax
- Manual and automatic control via SNMP
- Flexible configuration options
- Other redundancy options available

Rack Chassis



- 3U accepts up to 13 RF or Support cards, plus an SNMP card and dual power supplies
- A 1U chassis accepts up to 3 RF or Support cards or 2 cards and an SNMP card (with dual power supplies)
- Up to 26 channels per 3U chassis (using dual RF cards) - reducing the amount of rack space required
- Blind mate option
- All modules hot-swappable and auto-reconfigure with SNMP option
- On-card LNB and BUC power options
- Power fed through rear chassis connector to card Bias Tees
- System can be monitored and controlled remotely via SNMP using a web browser

Outdoor Enclosures



- CE approved and EMC compatible
- IP rated and NEMA approved
- Plug and play format
- Suitable for harsh environments
- All modules hot swappable
- Dual redundant power options
- Interface for monitor and control (M&C) systems

